

IPPTZ-SB3IR20X: Specifications


3mp IP Network PTZ Weatherproof with IR & 20x Zoom **SIBELL**



Key Features:

- 3 Mega Pixel (2048 x 1536 @25/30fps)
- H.265 Video Encoding
- SD card local storage
- Supports select area amplification and PTZ functions
- Smart Alarm Motion & Sensor
- 325 feet IR night view distance
- Supports local CVBS video output and two-way audio
- IP66 Weatherproof
- TVS 6KV lightning protection, surge protection
- 24vAC Power Supply
- Supports smart phone, iPad, remote monitoring

Dimensions:

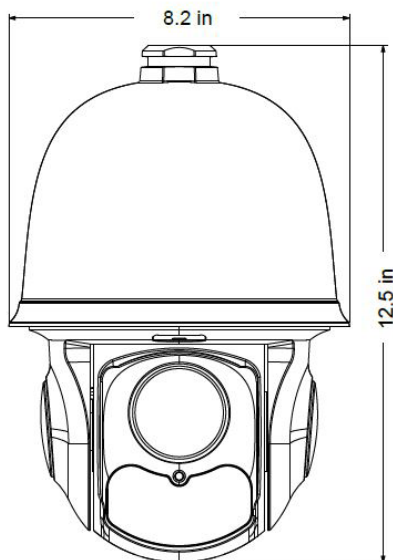

Model#: IPPTZ-SB3IR20X	
Camera	
Image Sensor	1 / 3 " Progressive CMOS
Image Size	2048 x 1536 3MP (1200 TVL)
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0 LUX
IR Distance	325 feet (100m)
White Balance	Auto/ Manual
S/N Ratio	Max 48dB
Day/ Light	Auto/ Manual
Focus Mode	Auto/ Manual
Lens	20x Zoom, f=5.5-110 mm, F1.6 ~ F3.5
PTZ	
Pan Range	360° endless rotation
Pan Speed	Preset speed : 240 °/s; Manual control speed : 0.5 ~ 90 °/s
Tilt Range	0 ~ 93° (auto rotation)
Tilt Speed	Preset speed : 160 °/s; Manual control speed : 0.5 ~ 90 °/s
System	
PTZ Control	Yes
Preset	255
Cruise	8
Track	4
Time Task	8
Scan	2
Home Position	Yes
Auto Flip	Yes
OSD Menu	English
Alarm	Input: 1 Output: 1
Alarm Linkage	Yes
Network	
Compression	H.265
Frame Rate	1 ~ 30fps (25 fps)
Protocol	TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
Storage	SD card local storage, network remote storage
Smart Alarm	Motion Alarm, Sensor Alarm
Resolution	3MP (2048 × 1536), 1080P (1920 × 1080), 720P (1280 × 720), VGA (640 × 480)
Multi-stream	yes
Port	
Network Interface	10 Base-T / 100 Base-TX, RJ45
Audio	MIC input × 1, MIC output × 1
Other	
Control	Network
Power Supply	AC 24V / 3000 mA
Power Consumption	15 W (max 30W, IR on)
Working Environment	Temperature : - 20 °C ~ 60 °C; Humidity : less than 95%
Protection Level	IP66; TVS 6KV lightning protection, surge protection
Weight	3.5KG
Dimensions (mm)	Ø 209 × 317

Specification Subject to change without Notice*